RoHS2.0 Compliant

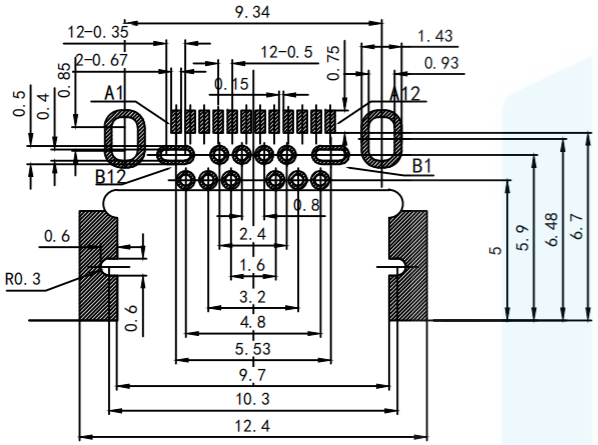

RECOMMEND P.C.B LAYOUT

TOLERANCE UNSPECIFIED ±0.05

















SPECIFICATION

1. ELECTRICAL:
   1-1: CURUENT RATAING:
      VBUS AND GND CONTACTS RATED AT 1.25A
      PARALLELED FOR A TOTAL OF 5A;
   1-2: INITIAL CONTACT RESISTANCE :40 MEGOHMS
   1-3: DIEELECTRIC WITHSTANDING VOLTAGE:
      100V AC MIN;
2: MECHANICAL CHARACTERISTICS:
   2-1: MATING FORCE: 5~20N
   2-2: UNMATING FORCE: 8~20N (INITIAL),
      6~20N (AFTER 10000 CYCLES)
   2-3: FREQUENCE: 200±50 CYCLES /HOUR, 10000 CYCLES
   2-4: OPERATING TEMPERATURE ; -40° ~80° .
3: WATERPROOF: IP-X7.

TOLERANCE	
X.XXX	±0.05
X.XX	±0.15
X.X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON

东莞市恒祺电子科技有限公司
Dongguan Hengqi Electronic Technology Co., Ltd
https://www.hq-dz.com phone:15812872448

TITLE: USB 3.1 TYPE-C 前插后贴 沉板1.0

PART NO: TYPE-C24P-FS009

DRAWING NO: 10.4*9*2.56

DRAWN:		DATE:	18-10-08	UNIT: mm
CHECKED:		DATE:	18-10-08	SCALE: FULL
APPROVED:		DATE:	18-10-08	SIZE: A4